

TOUCH ITALIA

DIGITAL SIGNAGE | RETAIL | HOSPITALITY | INDUSTRIAL

TEU-215S2-D-P

21.5 - inch



Touchscreen Monitor



PCap 10 -touch
Zero bezel design

LED backlight
24/7 operation
USB-C connectivity

3 years Warranty
IP65 Compliant
front side

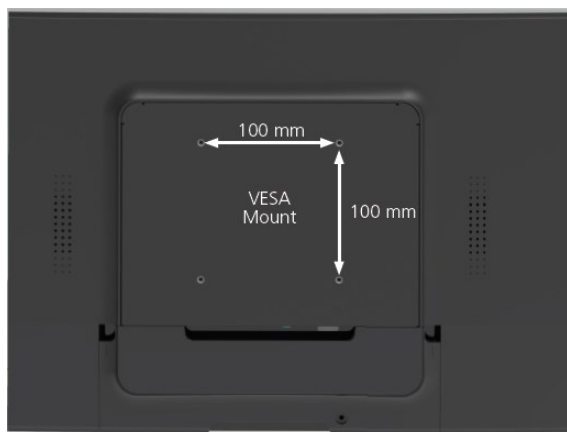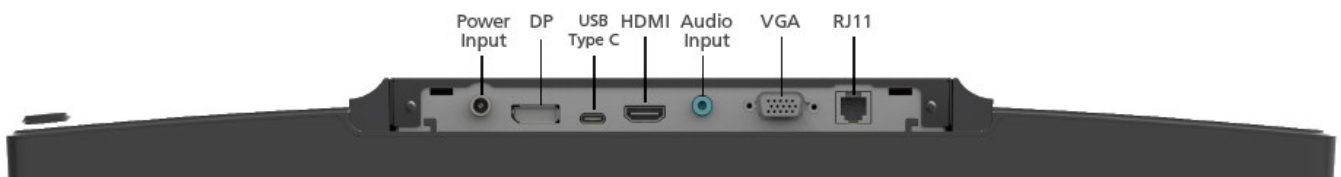

Slim, Durable and
Space-Saving



Specification

TEU-215S2-D-P	
Size	21.5" TFT LED LCD
Max Resolution	FHD 1920 x 1080
Contrast Ratio	1000:1
Brightness	250 nits
View Angle	H/V 178° wide viewing angle
Touch LCD Display	
Touchscreen	Projected Capacitive
Touch Points	10 Points
Touchscreen Interface	USB-HID
Display surface	7H Hardness durable glass
I/O Ports	
RJ-11	1 x RJ11 for Remote Key
Usb Port	1 x USB Type-C (Alt Mode for DP video support)
Video Port	1 x VGA, 1 x Display Port, 1 x HDMI
Audio Port	1 x Audio-Input (3.5mm Mini-Jack)
Power Input	1 x 12V DC Jack Power Input
Physical Properties	
Speaker	2 x 2W Stereo
Power Supply	50W (12V / 4.16A) External Power Adaptor
Housing Color	Black
Construction	Plastic, Glass, SECC Metal
Compliance	IP65 Compliant Front Side, IPX1
Dimension (without stand)	510.96 x 308.01 x 37.9 mm
Net Weight	4.04 Kg
Gross Weight	6.40 Kg
Shipping Dimension	610 x 405 x 160 mm
VESA mount	100 x 100 mm
Safety	
Certifications	CE, FCC, LVD, RoHS
Environment	
Operating Temperature	0° - 40°C, 20% - 80% RH Non-Condensing
Storage Temperature	-20° - 60°C, 10% - 90% RH Non-Condensing