



DI SERIES

# DI881LT2


88" 1000 Nits Bar-type Digital Signage Display



24 / 7  
OPERATION




32 : 9  
ASPECT RATIO



BUILT-IN  
MEDIA PLAYER



FANLESS



TRUECOLOR™  
CALIBRATED

## FOR MORE INFORMATION

For more information about DynaScan, visit our site at [www.dynascandisplay.com](http://www.dynascandisplay.com). Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.



# DynaScan

# SPECIFICATION

<b>MODEL</b>	DI881LT2		
<b>PANEL</b>	LCD Panel Type	87.8 inches LCD	
	Native Resolution	3840 x 1080 (32 : 9)	
	Backlight	LED	
	Default Color Temperature	D65 (6500 K)	
	Brightness	1000 nits	
	Color Depth	10 bits	
	Contrast Ratio	3000 : 1	
	Response Time (Typ.)	8 ms	
	Viewing Angle (H/V)	178° / 178°	
	Light Life Time (Typ.)	50,000 hrs	
<b>POWER</b>	Blackening Defect Free	Up to 110°C (230°F)	
	Panel Surface	AG Haze 1%, 3H	
	Power Supply	Internal	
	Rated Voltage	100-240V ~ 50/60Hz	
<b>MECHANICAL SPECS</b>	Power On Mode (Typ./ Max)	360 W / 580 W	
	Power Saving Mode	< 1 W	
	Bezel Width (T/B/L/R)	5.8 / 5.8 / 4.3 / 4.3 mm	
	Cabinet Color	Black	
<b>USER INTERFACE</b>	Monitor Dimension (LxHxD)	2158.4 x 611.3 x 84.0 mm	
	Monitor Weight	38.5 kg	
	Orientation	Portrait / Landscape	
	VESA Mounting (LxH)	600 x 400 mm	
	Carrying Handles	Yes	
	Fanless Design	Yes	
	Language	English	
	Support SNMP (Up to V3.0)	Yes	
	Image Retention Protection	Yes	
	Ambient Light Sensor	Yes	
<b>INPUT</b>	Power On/Off Scheduling	Yes	
	Internal Temperature Sensor	Yes	
	OSD Menu Rotation	Yes	
	HDMI	x2 (2160P)	
<b>OUTPUT</b>	DisplayPort	x1	
	USB	x1 (For Internal Player), x1 (Service Port)	
	SD Slot	x1	
<b>EXTERNAL CONTROL</b>	Audio	x1	
	RS-232	In x1, Out x1	
	RJ-45	x1 (LAN)	
<b>INTERNAL PLAYER</b>	Operating System	Android 7.1.2	
	Processor	ARM Quad-Core Cortex-A17	
	Clock Speed	1.6GHz	
	Main Memory Interface	DDR3, 2G	
	Graphics	Mali-T764 GPU	
	Storage	Internal: 8GB eMMC Flash External: Support SD , Up to 32GB	
	Multimedia	4K 10bits H265/H264 video decoders 1080P other video decoders (VC-1, MPEG-1/2/4, VP8) 1080P video encoder for H.264 and VP8	
	Wi-Fi Specification	802.11 b/g/n   2412.0MHz - 2462.0MHz	
	<b>ENVIRONMENT</b>	Operating Temperature	0° C ~ 40° C
		Storage Temperature	-20° C ~ 60° C
Humidity		10% ~ 80% RH Non-condensing	
<b>CERTIFICATION</b>	CE / FCC / RoHS		

# DIMENSIONS

Unit: mm [inch]

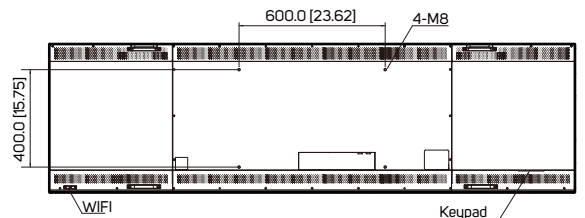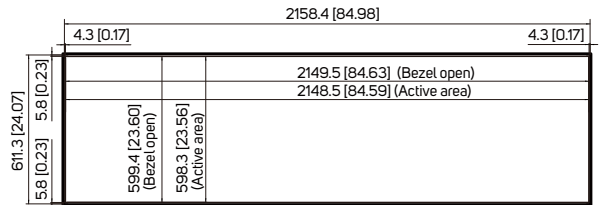

# INTERFACE

